

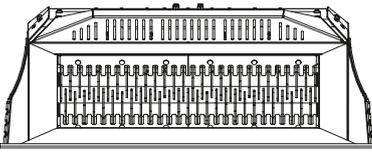


# MB-HDS220

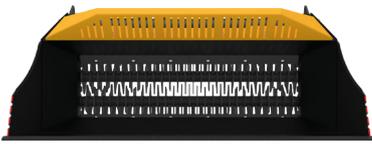

890 mm

2220 mm

1060 mm



## CARACTERÍSTICAS TÉCNICAS

 Retrocargadora / Cargador** aconsejado	ton	$\geq 7 \leq 11$
 Minicargador aconsejado*	ton	$\geq 4,5 < 10$
Peso	ton	1,00
Capacidad de carga	m <sup>3</sup>	0,60
Presión	bar	> 300
Caudal de aceite**	l/min.	90
Dimensiones	mm	2220 x 1060 x H 890

\* Vedi normative di legge su carico e ribaltamento UNI ISO 14397 - 1:2008.

\*\* Il valore della portata idraulica deve essere raggiunto in concomitanza con la pressione di esercizio richiesta.

## KIT DE ROTORES

KIT	REGULACIÓN*	TIPO DE PROCESAMIENTO
 Kit de Cribado RQ8/RQ20	8/20 mm	Cribado de tierra húmeda/seca Aireación del terreno
 Kit de Mezclado RM	-	Aireación del terreno Aireación de compostaje Reducción de carbón vegetal Reducción de vidrio Reducción de cartón-yeso

\* rotor en posición de cierre

## ACCESORIOS OPCIONALES

Kit de Cribado RQ8/RQ20

Kit de Mezclado RM

Contenedor porta rotores

Garantía de 24 meses

## ÁREAS DE APLICACIÓN

